



SOLID T4-3

**MAXIMUM FLEXIBILITY
FOR SMOOTH
PRODUCTION
AND LOGISTICS
PROCESSES**

4-inch Thermal Printer for the Toughest Continuous use

HIGHLIGHTS / FEATURES / SPECIAL ATTRIBUTES

- Optional with cutter and internal rewinder
- USB, Ethernet (10/100 Mbit) as standard
- Laser printer compatible
- SAP® and AS/400 compatible (through PCL5 + JetCAPS as well as LAN-IPDS)
- Very high printing speed (up to 16 inch per second)
- Robust metal case

FIELD OF APPLICATION

- Stickers, shipping labels and tags
- Fast just-in-time printing or batch processing
- Suitable for the toughest continuous loads
- For the most demanding production and logistics applications in plant engineering, automotive, logistics, e-commerce, retail, etc.



Print Engine

Print technology	Thermal transfer/direct thermal harmonic (corner-edge print head)
Controller	MPC 8.x
Print speed	up to 406 mm/s
Print resolution	up to 16 inch/s
Lifetime print head	300 dpi x 300 dpi
Power supply	Transfer: up to 50.000 m, Direct: up to 25.000m
Power consumption	110/240VAC, 50/60Hz
Dimensions (WxDxH in mm)	312 x 496 x 330
Weight	18,6 kg (without options)
Environment temperature	5 - 40°C
Relative humidity	20 - 85 % (rel., non-condensing)
Interfaces	USB, RS232, RS422
Optional*	Ethernet-Interface 10/100 MBit, bi-directional (TCP/IP) IEEE 1284 (Centronics) WIFI: IEEE 802.11 n/g/b, WEP with 64 and 128 Bit, WPA/WPA2, WPA-PSK/WPA2-PSK
Memory	RAM: 256 MB Flash: 256 MB

MPC 8.x High-End Print-Controller

Emulations

MICROPLEX IDOL, HP-PCL5/HPGL, AGFA Reno, LN03+, BULL-MP6090, IGP/PGL, Datamax, Etimark MP-1220, TEC Bx72, TEC B6xx, LDC, ZPL II, EPL2, Intermec Direct Protocol, IER Command, cab, Godex EZPL, Diablo 630, IBM Proprinter, Epson FX-80 (ESC/P), MT-600/MT40, IDS, ANSI Genicom, TIFF, HP Designjet, XML (SAP® RFID), CUPS Raster, PDF Direct Printing**

Optional Emulations

μ-Postscript, CODE-V (Magnum), XEROX XES, KODESCRIPT+, Prescribe/PSB 2, Labelpoint, IPDS, AEA, (more emulations on request)

Barcodes

EAN 8, 13, 128, add on, 2/5 3-stroke Datalogic, 2/5 3-stroke Matrix, Codabar, PDF 417, Royalbar, Planet, Jetcaps (HP/SAP), Code 39, 128 MSI, UPC A, E, Postnet, KIX, USPS One Code

Optional Barcodes (Barcode 2)

Datamatrix, Maxi-Code, QR Code, Aztec-Code, USD-5 (more barcodes on request)

Additional functions

Network capabilities	authentication standard IEEE 802.1X
Intelligent barcode generation	on-the-fly in the printer.
Format splitting	in several subformats by command.
Ribbon Save Mode	active from 12 mm unprinted length, to save ribbon.

Optional functions

Integrated form management (RFM)

Forms and fonts can be stored in the flash memory and can be accessed when needed.

Status-Out

gives notice of each correctly printed page via interface. Further features can be found in the manual.

Programmable GPIO-Interface (SPS-Control)

EMBEDDED INTELLIGENCE – Enabling two-way communication between printer and a PLC.

Integration of the printer into production lines is possible, controlled by GPIO-interface.

Customer / Application specific modifications possible.

* Not all interface options can be activated at the same time.

** Only available from MPC 3.6 MPC 7.X and MPC 8.x

The brand names referred to are the registered trademarks of the respective companies. Technical data is subject to change. The information contained in this specification sheet refers exclusively to the described details and not to warranted characteristics. No guarantee is assumed. The information do not exempt from the obligation for inspection of each respective individual case. Version 21.01.2026

EMEA
APAC

MICROPLEX PRINTWARE AG
Panzerstraße 5, 26316 Varel
Germany
Phone: +49 4451 91370
E-Mail: sales@microplex.de

AMER
Canada

MICROPLEX PRINTWARE CORPORATION
30300 Solon Industrial Pkwy Suite E, Solon, OH 44139
USA
Phone: +1 440-374-2424
E-Mail: info@microplex-usa.com




Printable Media

Size	20 - 120 mm width
with Dispenser	30 - 115 mm width
	printable width 106 mm
Roll diameter	max. 210 mm
Core diameter	1,5 / 3 / 4 Inch (38,1 - 102 mm)
Weight	60 - 160 g/m ² (label) max. 240 g/m ² (cardstock)

Thermal transfer

ribbon	roll diameter max. 105 mm
Core diameter	1 inch (25.4 mm)
Ribbon length	max. 600 m
Coated side	inside or outside
Ribbon width	25 - 110 mm
Ribbon save	standard

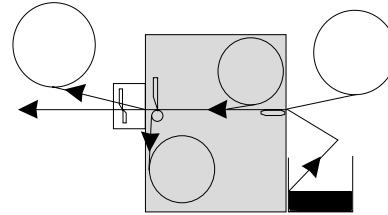

Paper Path

Input	Continuous internal from roll, external, e.g. fanfold standard: Gap sensor (transmissive) optional: Black Mark sensor (reflection)
--------------	---

Output

Single / Job tear-off

Optional	peel-off, Cutter cutter
-----------------	----------------------------