

SOLID F140

**HIGH PERFORMANCE,
IMPRESSIVE COST
EFFECTIVENESS**

Efficient Flash Fusing Printer for Sensitive Materials

HIGHLIGHTS / FEATURES / SPECIAL ATTRIBUTES

- Prints on paper, PVC, plastic, etc.
- USB, Ethernet (10/100/1000 Mbit) as standard
- Laser and matrix printer compatible
- SAP® and AS/400 compatible (through PCL5 + JetCAPS as well as LAN-IPDS)
- Perfect control via Status Out

FIELD OF APPLICATION

- Label batch printing
- Ticket printing
- Business and logistics documents



Print Engine

Print technology	LED, OPC xenon flash lamp with halogen preheat
Controller	MPC 3.4
Print speed	5000 lpm (6 lpi) up to 140 pages/minute (A4 portrait 2-up)
Print resolution	max. 600 dpi x 600 dpi
Duty cycle	up to 750.000 pages (A4 2up) (based on a using period of 60 month)
Power supply	230V +/-10% , 50 Hz
Power consumption	max. 4 KVA (in operation) max. 0,6 KVA (in stand-by)
Dimensions (WxDxH in mm)	800 x 890 x 1330 (Printer only) 800 x 1515 x 1330 (Printer with Stacker)
Weight	275 kg (with Stacker)
Environment temperature	15 - 30°C
Relative humidity	30 - 80 % (rel., non-condensing)
Interfaces	USB Ethernet-Interface, 10/100/1000 MBit, bi-direktional (TCP/IP)
Optional	IEEE 1284 (Centronics), WIFI IEEE 802.11 n/g/b, WEP mit 64 und 128 Bit, WPA/WPA2, WPA-PSK/WPA2-PSK
Memory	RAM: 4 GB Flash: 16 GB

MPC 3.x High-End Print-Controller

Emulations

MICROPLEX IDOL, HP-PCL5/ HPGL, AGFA Reno, μ -Postscript, LN03+, BULL-MP6090, Etimark MP-1220, TEC Bx72, TEC B6xx, Diablo 630, IBM Proprinter, EPSON FX-80 (ESC/P), MT-600/MT40, IDS, ANSI Genicom, TIFF, XML (SAP® RFID), CUPS Raster

Optional Emulations

CODE-V (Magnum), XEROX XES, KODESCRIPT+, Prescribe/PSB 2, IGP/PGL, Datamax, Labelpoint, LDC, ZPLII, EPL 2, Intermec Direct Protocol, IER Command, cab, Godex EZPL, HP Designjet, IPDS, AEA, PDF Direct Printing*, (more emulations on request)

Barcodes

Codebar, Code39, MSI, PDF417, Interleaved 2/5, Interleaved 2/5 (3-Stroke Datalogic), Interleaved 2/5 (3-Stroke Matrix), EAN-8, 13, 128, Add-On-Codes, Code11, Code93, Code 128, UPC-A, UPC-E

Optional Barcodes (Barcode 2)

Datamatrix, Maxi-Code, QR Code, Aztec-Code, USD-5 (more barcodes on request)

Additional functions

Network capabilities	authentication standard IEEE 802.1X
Intelligent barcode generation	on-the-fly in the printer
Format splitting	in several subformats by command
Integrated form management (RFM)	Forms and fonts can be stored in the flash memory and can be accessed when needed

Optional functions

Status-Out

gives notice of each correctly printed page via interface. Further features can be found in the manual.

Programmable GPIO-Interface (SPS-Control)

EMBEDDED INTELLIGENCE – Enabling two-way communication between printer and a PLC.

Integration of the printer into production lines is possible, controlled by GPIO-interface

Customer / Application specific modifications possible.




Printable Media

Size

Form length	7" - 24"
With stacker	7" - 14"
Form width	6" - 18"
Printable area	17"

Weight

60 - 204 g/m²

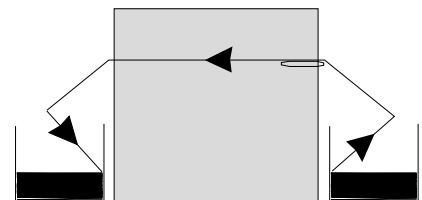

Paper Path

Input

push tractor

Output

stacker
capacity: 3.000 pages (at 64 g/m²)

* Only available with MPC 3.4, MPC 3.6, MPC 7.1 and MPC 8.x

The brand names referred to are the registered trademarks of the respective companies. Technical data is subject to change. The information contained in this specification sheet refers exclusively to the described details and not to warranted characteristics. No guarantee is assumed. The information do not exempt from the obligation for inspection of each respective individual case. Version 22.08.2022

EMEA
APAC

MICROPLEX PRINTWARE AG
Panzerstraße 5, 26316 Varel
Germany
Phone: +49 4451 91370
E-Mail: sales@microplex.de

AMER
Canada

MICROPLEX PRINTWARE CORPORATION
30300 Solon Industrial Pkwy Suite E, Solon, OH 44139
USA
Phone: +1 440-374-2424
E-Mail: info@microplex-usa.com



PRINTING TECHNOLOGIES
ENGINEERED IN GERMANY

www.microplex.de